



LF Linear Bearing




Round rail bushing with either a round or square type flange. Diameters from 12mm to 30mm.

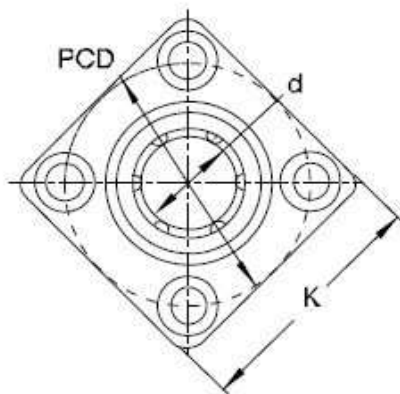

Type: D

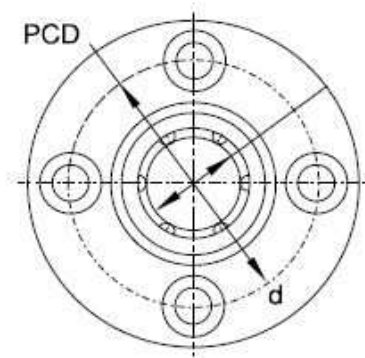


Type: N

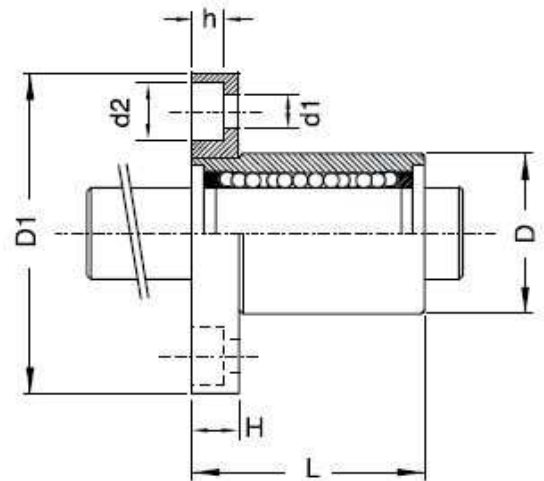

Model No.	External Dimension											Basic Load Rating		Weight		
	d	D	D Tolerance	D1	H	L	L Tolerance	K	d1	d2	h	PDC	(Ca)	(Coa)	(g)	
LF12	12	21	+0 / -0.011	42	7	31	+0 / -0.020	32	4.5	7.5	4.1	32	42	61	75	
LF12UU																
LF16	16	28	+0 / -0.013	48	7	38		37	4.5	7.5	4.1	38	79	120	135	
LF16UU																
LF20	20	32	+0 / -0.016	54	9	43		42	5.5	9	5.1	43	90	143	180	
LF20UU																
LF25	25	40		+0 / -0.016	62	9	60	+0 / -0.030	50	5.5	9	5.1	51	100	160	345
LF25UU																
LF30	30	45		+0 / -0.016	74	11	65		58	6.6	11	6.1	60	160	280	465
LF30UU																


LU Linear Bearing

Aluminum pillow block. Diameters from 12mm to 30mm.

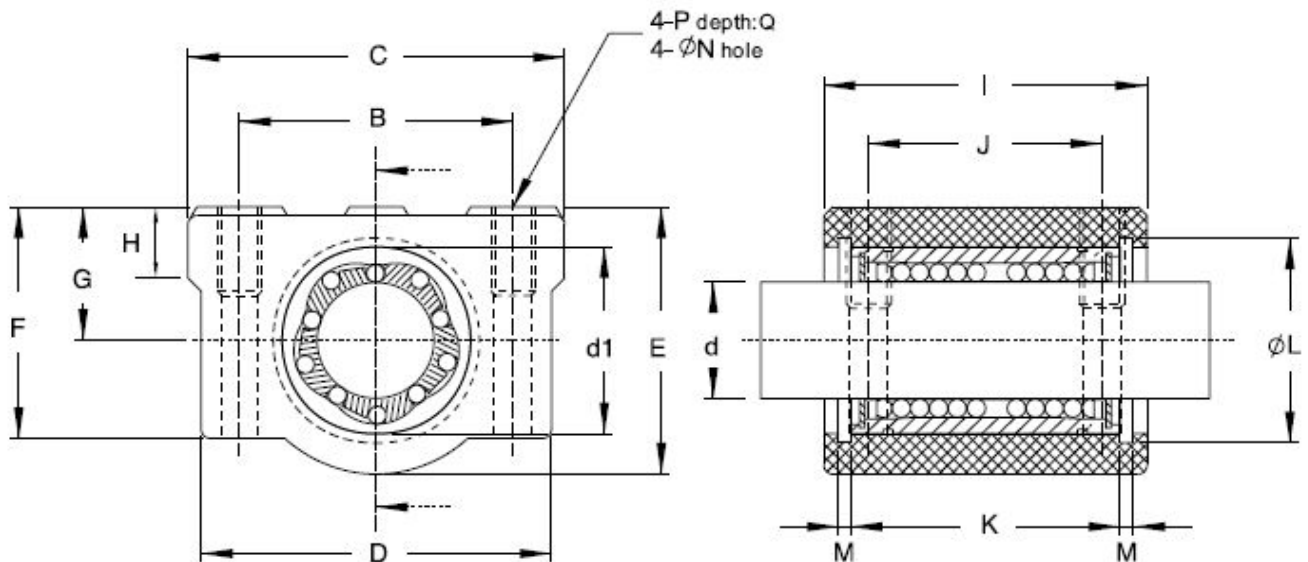[illegible]

SS End Support Unit


Aluminum Support unit for linear shafting. Diameter from 12mm to 30mm.

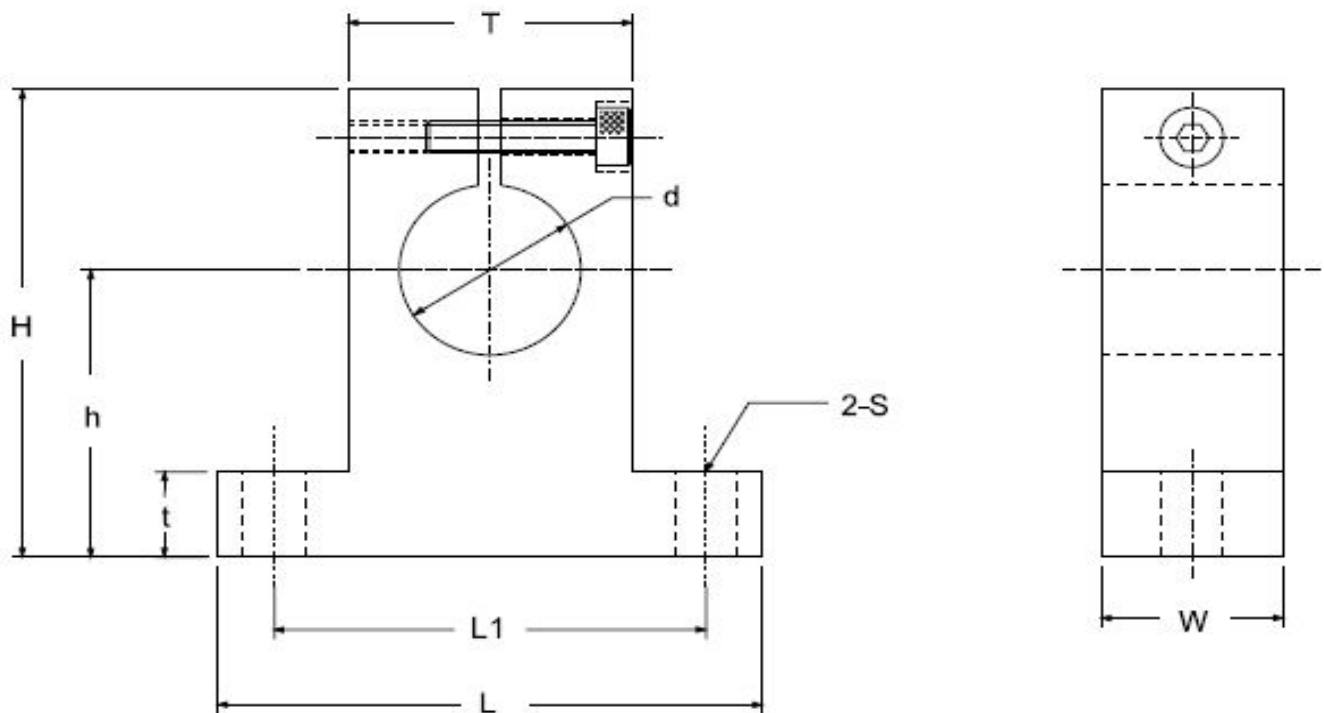

Model No.	External Dimension									Weight
	d	H	h +/-0.02	t	L	L1	W	T	S	(g)
SS12	12	38	23	6	42	32	14	20	5.5	32
SS16	16	44	27	8	48	38	16	25	5.5	51
SS20	20	51	31	10	60	45	20	30	6.6	88
SS25	25	60	35	12	70	56	24	38	6.6	153
SS30	30	70	42	12	84	64	28	44	9	235

SF Ground Shafting

Precision ground shafting. Diameters from 4mm to 50mm and lengths up to 7500mm.

[illegible]